


CYLINDER ACTUATED BUTTERFLY VALVE **Wilson**

ACTUATOR: STD DOUBLE ACTING

複動式蝶型閥

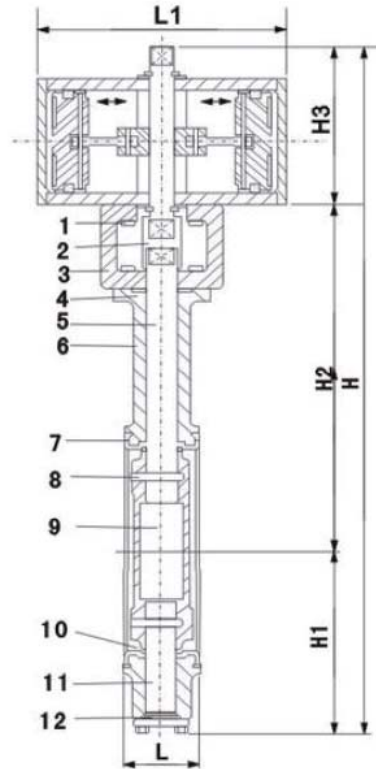

SPECIFICATION


OPERATING PRESSURE: 4~6kg/cm²
 END CONNECTION: WAFER TYPE
 WORKING PRESSURE: 150PSI

ACCESSORY

SOLENOID VALVE, LIMIT SWITCH
 AIR SET & LUBRICATOR
 HAND WHEEL

DIMENSION		L	L1	H	H1	H2	H3
SIZE (mm)	SIZE (inch)						
50	2"	43	131	387	82	215	90
65	2½"	46	165	427	92	226	109
80	3"	46	165	440	98	233	109
100	4"	52	200	499	113	263	128
125	5"	56	200	526	127	276	128
150	6"	56	200	556	141	292	128
200	8"	60	249	648	172	333	143
250	10"	68	292	761	210	378	173
300	12"	78	328	845	242	401	202

NO. ITEM	NAME	MATERIAL	NO RE	NO. ITEM	NAME	MATERIAL	NO RE
1	BOLT	SUS304	4	8	SHAFT	SUS304	1
2	ADAPTOR	SCS13	1	9	DISC	SOS13	1
3	YOKE	SCS13	1			FCD45	
4	"O"RING	NBR	1	10	"O"RING	NBR	1
5	STEM	SUS304	1	11	STEM	SUS304	1
6	BODY	FC-25	1	12	BOLT	STEEL	2
7	SEAT RING	NBR	1				



偉群國際有限公司
新竹縣竹北市國盛街 271 號
電話：03-555-6551，傳真：03-555-0352
<http://www.wilson-co.com.tw>

Wilson-International Co.
No.271, Guosheng St., 302-44 Zhubei City,
Hsin Chu County, Taiwan, ROC.

WE SERVE. WE CARE. WHAT YOU NEED. EVERY WHERE AND EVERY TIME.