

HEAVY DUTY KNIFE GATE VALVE (DOUBLE ACTUATOR)


3"-16" SERIES WIC32


TEFLON SEAT

DOUBLE ACTUATING

Features:

- Main parameters:
 - Nominal pressure rating :
PN 6,10
 - Nominal diameter : ϕ 80~ ϕ 400mm
 - Working temperature :
-20°C ~+180°C
 - Solenoid valve working voltage :
 - (1) 24V DC
 - (2) 220V AC
 - (3) 110V AC
 - Air-supply pressure :
4-10 Bar G
 - Leakage : Class IV
- Seal type : Teflon soft seal
- Main material :
 - valve body :
SUS 304 ZG0Cr18Ni9
 - Valve plug :
F321 1Cr18Ni9Ti
- Optional accessories :
 - Position limit switch
 - A. Contact type
 - B. Induction type

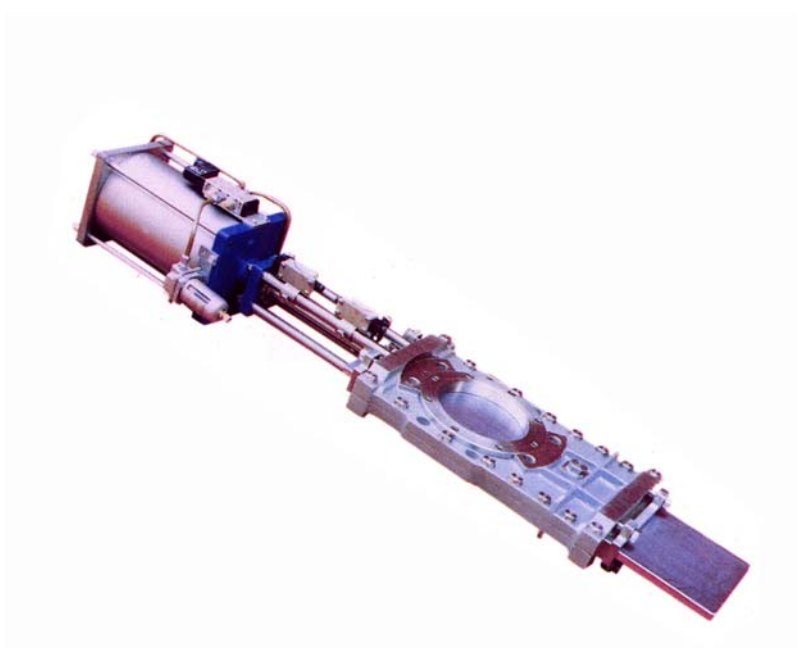



偉群國際有限公司
新竹縣竹北市國盛街 271 號
電話：03-555-6551 · 傳真：03-555-0352
<http://www.wilson-co.com.tw>

Wilson-International Co.
No.271, Guosheng St., 302-44 Zhubei City,
Hsin Chu County, Taiwan, R.O.C.

WE SERVE. WE CARE. WHAT YOU NEED. EVERY WHERE AND EVERY TIME.